

# Registro A.E.E.



Home

Scrivane Telematiche

Produttori

Sistemi Collettivi di  
Finanziamento

Registro AEE

Produttori

Finanziamento  
Finanziamento  
Finanziamento

Finanziamento  
Finanziamento  
Finanziamento

Finanziamento  
Finanziamento  
Finanziamento

Finanziamento  
Finanziamento  
Finanziamento

Finanziamento  
Finanziamento  
Finanziamento

Finanziamento  
Finanziamento  
Finanziamento

Finanziamento  
Finanziamento  
Finanziamento

Accesso

Segui @MUD\_Ecoceived

ecocamere

Home » Registro AEE » Produttori

## Produttori iscritti al Registro AEE

Ricerca

Numero iscrizione

Profilo

Ragione Sociale

Apparecchiatura

Soggetto

Tipo soggetto

Nazione

Codice Fiscale

[ Tutte ]

[ Tutte ]

[ Tutte ]

[ Tutte ]

[ Tutte ]

[ Tutte ]

Provincia

[ Tutte ]

Legenda: ☒ iscritto ☐ sospeso

Visualizza

Pulisci

25 righe per pagina

Numero iscrizione

IT18030000010291

Denominazione

HIKVISION ITALY S.R.L.

Provincia

MILANO

Nazione

ITALIA

Da 1 a 1 di 1

<< < 1 > >>

LICEO STATALE "WALTER GROPIUS" - POTENZA  
LICEO ARTISTICO - LICEO MUSICALE E COREUTICO  
Prot. 0012301 del 25/09/2023  
VI-3 (Entrata)

## DS-D2055LU-Y LCD Display



The DS-D2055LU-Y LCD display uses an industry-level ultra-narrow bezel design, which enables a bezel width of 3.5 mm between neighboring displays. The adopted direct-lit LED backlighting technology helps achieve ultra-high and uniform brightness of 500 cd/m<sup>2</sup> without boundary shadows. The display has abundant interfaces for video inputs, such as DVI, VGA, HDMI, and DP.

- 4K signal input, auto loop up to 30 screens with HDMI interfaces
- Switching between three picture modes: Monitoring, Meeting, and Movie
- Factory calibration for color and brightness uniformity
- Direct-lit LED backlight with uniform brightness and no boundary shadows
- 1920 × 1080 resolution, 178° viewing angle
- Ultra-narrow 3.5 mm bezel design
- Anti-glare, high definition, high brightness, high color gamut, and vivid images with rich colors
- Stable and 24-hour continuous working
- Metal casing for preventing from radiation and magnetic & electric field interference
- Wall-mount and modular brackets available to meet various installation requirements




## ■ Specification

| Model               |                               | DS-D2055LU-Y                                                                                                                                                                                                             |
|---------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Display             | Screen Size                   | 55 inch                                                                                                                                                                                                                  |
|                     | Active Display Area           | 1209.6 (H) mm × 680.4 (V) mm                                                                                                                                                                                             |
|                     | Backlight                     | Direct-lit LED backlight                                                                                                                                                                                                 |
|                     | Pixel Pitch                   | 0.63 mm                                                                                                                                                                                                                  |
|                     | Physical Seam                 | 3.5 mm                                                                                                                                                                                                                   |
|                     | Bezel Width                   | 2.3 mm (top/left), 1.2 mm (bottom/right)                                                                                                                                                                                 |
|                     | Resolution                    | 1920 × 1080@60 Hz (downward compatible)                                                                                                                                                                                  |
|                     | Brightness                    | 500 cd/m <sup>2</sup>                                                                                                                                                                                                    |
|                     | Viewing Angle                 | Horizontal 178°, vertical 178°                                                                                                                                                                                           |
|                     | Color Depth                   | 8 bit, 16.7 M                                                                                                                                                                                                            |
|                     | Contrast Ratio                | 1200:1                                                                                                                                                                                                                   |
|                     | Response Time                 | 8 ms                                                                                                                                                                                                                     |
|                     | Color Gamut                   | 72% NTSC                                                                                                                                                                                                                 |
|                     | Surface Treatment             | Haze 25%, 3H                                                                                                                                                                                                             |
| Interface           | Video & Audio Input           | HDMI × 1, DVI × 1, VGA × 1, DP × 1, USB × 1                                                                                                                                                                              |
|                     | Video & Audio Output          | HDMI × 1                                                                                                                                                                                                                 |
|                     | Control Interface             | RS232 IN × 1, RS232 OUT × 1                                                                                                                                                                                              |
| Power               | Power Supply                  | 100 ~ 240 VAC, 50/60 Hz                                                                                                                                                                                                  |
|                     | Power Consumption             | ≤ 187 W                                                                                                                                                                                                                  |
|                     | Standby Consumption           | ≤ 0.5 W                                                                                                                                                                                                                  |
| Working Environment | Working Temperature           | 0 °C to 40 °C (32 °F to 104 °F)                                                                                                                                                                                          |
|                     | Working Humidity              | 10% to 80% RH (non-condensing)                                                                                                                                                                                           |
|                     | Storage Temperature           | -20 °C to 60 °C (-4 °F to 140 °F)                                                                                                                                                                                        |
|                     | Storage Humidity              | 10% to 80% RH (non-condensing)                                                                                                                                                                                           |
| General             | Casing Material               | SECC                                                                                                                                                                                                                     |
|                     | VESA                          | 600 (H) mm × 400 (V) mm                                                                                                                                                                                                  |
|                     | Product Dimension (W × H × D) | 1213.5 mm × 684.3 mm × 71.74 mm (47.78" × 26.94" × 2.82")                                                                                                                                                                |
|                     | Package Dimension (W × H × D) | Carton with two displays: 1404 mm × 910 mm × 464 mm (55.28" × 35.83" × 18.27")<br>Carton with a single display: 1404 mm × 910 mm × 464 mm (55.28" × 35.83" × 18.27")                                                     |
|                     | Net Weight                    | 27.23 ± 0.5 kg (60.03 ± 1.1 lb) for single display                                                                                                                                                                       |
|                     | Gross Weight                  | Carton with two displays: 58.4 ± 0.5 kg (128.75 ± 1.1 lb)<br>Carton with a single display: 31.1 ± 0.5 kg (68.56 ± 1.1 lb)                                                                                                |
|                     | Packing List                  | LCD display × 1, power cable × 1, network cable × 1, 2-meter HDMI cable × 1, screw × 4, remote control × 1, IR receiver × 1, RS-232 converter × 1, quick start guide (multilingual) × 1, quick start guide (English) × 1 |

## Physical Interface


| Interface | Description                               | Interface  | Description                               |
|-----------|-------------------------------------------|------------|-------------------------------------------|
| POWER     | Power indicator                           | DVI IN     | DVI-I input interface for digital signals |
| LINE OUT  | Audio output interface for analog signals | RS 232 OUT | Serial loopback output interface          |
| HDMI OUT  | HDMI output interface for digital signals | RS 232 IN  | Serial input interface                    |
| HDMI IN   | HDMI input interface for digital signals  | USB        | USB interface                             |
| DP IN     | DP input interface for digital signals    | IR         | IR input interface                        |
| VGA IN    | VGA input interface for analog signals    | SWITCH     | Switch button                             |

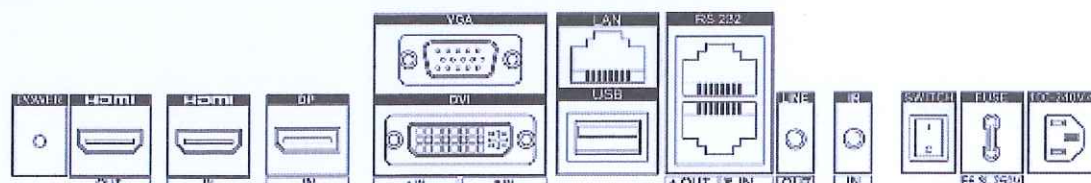

## Available Model

DS-D2055LU-Y

## Dimension

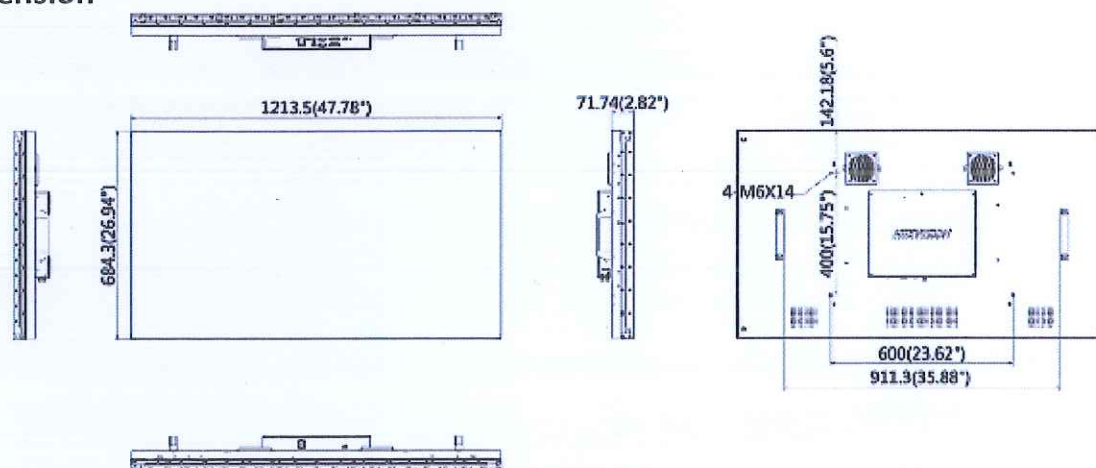

Unit: mm

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8907-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq





## Dichiarazione di Conformità UE

**Nome prodotto:** LCD Display Unit

**Modello del prodotto:** DS-D2055HE-G, DS-D2055LE-G, DS-D2055LU-Y, DS-D2055HU-Y, DS-D2055LR-G, DS-D2055HR-G

**Produttore:** Hangzhou Hikvision Digital Technology Co., Ltd.  
No. 555 Qianmo Road, Binjiang District, Hangzhou 310052, China

**Direttive:** 2014/30/EU  
2014/35/EU  
2009/125/EC  
2011/65/EU and subsequent updates

**Standard:** EN 55032:2015  
EN IEC 61000-3-2:2019  
EN 61000-3-3:2013+A1:2019  
EN 50130-4:2011+A1:2014  
EN 55035:2017  
EU 2019/2021&EU 2019-2013  
EN 62368-1:2014+A11:2017

**Il prodotto sopra descritto è conforme alla normativa di  
armonizzazione dell'Unione Europea.**

Firmato a nome e per conto di: Hangzhou Hikvision Digital Technology Co., Ltd.

**Firma:**

**Nome completo:** Gong, Yin

**Titolo:** Testing and Certification Director,  
Hangzhou Hikvision Digital Technology Co.,  
Ltd.

**Data di rilascio:** 18/02/2023

**Luogo:** Cina

**La presente dichiarazione viene rilasciata sotto la responsabilità  
esclusiva del produttore.**